

QSFP-SR4-100G

TEST REPORT (Cisco)



Content

1. Test Purpose 2

2. Test Results Summary 2

3. Test Environment 2

 3.1 Test Equipment Used..... 2

 3.2 Test Sample 3

4. Test Data 3

 4. 1 Product Performance Testing 3

1. Test Purpose

By building test scenarios and simulating the customer's usage environment, we test whether the module performance meets the customer's requirements.

2. Test Results Summary

Table 2: Test Results

1st Items	Test Data	Test Result
Time Since Last Clear [Min]	0.6	Pass
Effective Physical Errors	0	Pass
Raw Physical Errors Per Lane	0,0,0,0	Pass
Effective Physical BER	15E-255	Pass
Raw Physical BER	15E-255	Pass
Link Down Counter	0	Pass
Link Error Recovery Counter	0	Pass

3. Test Environment

3.1 Test Equipment Used

Table 3- 1: Test Equipment Used

Vendor	Device	Soft Version	Number
Cisco Switch	Cisco-NCS-55A2-MOD-S-DR	7.7.21	1
NVIDIA NICs	MCX515A-CCAT	16.35.3502	1
GPU Server	DELL PowerEdge R860		1
Optic Transceiver	QSFP-SR4-100G		2

3.2 Test Sample


Table 3-2: Test Sample

Product ID	P/N	Serial N umber
48354	QSFP-SR4-100G	A2510001132


4. Test Data

4.1 Product Performance Testing

Table 4- 1: Product Performance Testing

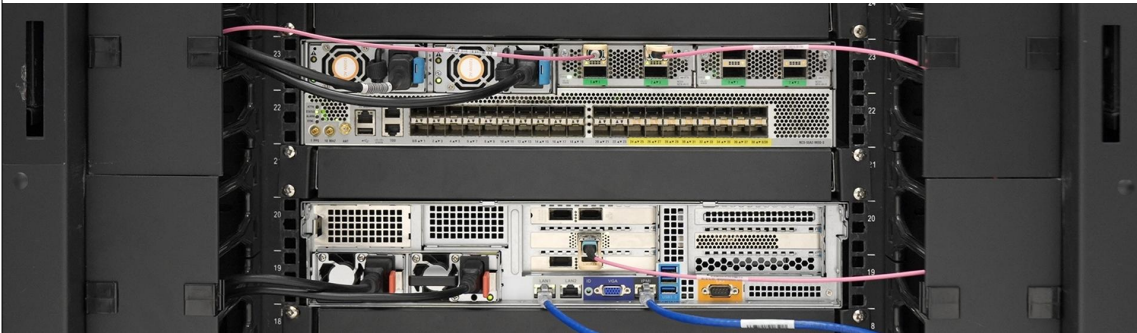Test Topology	Network topology: 	
	Test scenario: 	
Test Premise	1. The equipment can be normally powered up and run normally. 2. According to the above networking to build a test environment.	
Test Equipment	Device	Model No.
	QSFP-SR4-100G	A2510001132
Test Method	1. Set up the environment remotely according to the above figure. The AAA server address is 10.38.2. 125; 2. Test the connectivity between the switch and the AAA server; 3. Use SSH2 to log in to the server username and password on the PC (fs1, admin@123). 4. Intercept modules with substandard performance by comparing with the test index.	

1. Login to the server and enter root model

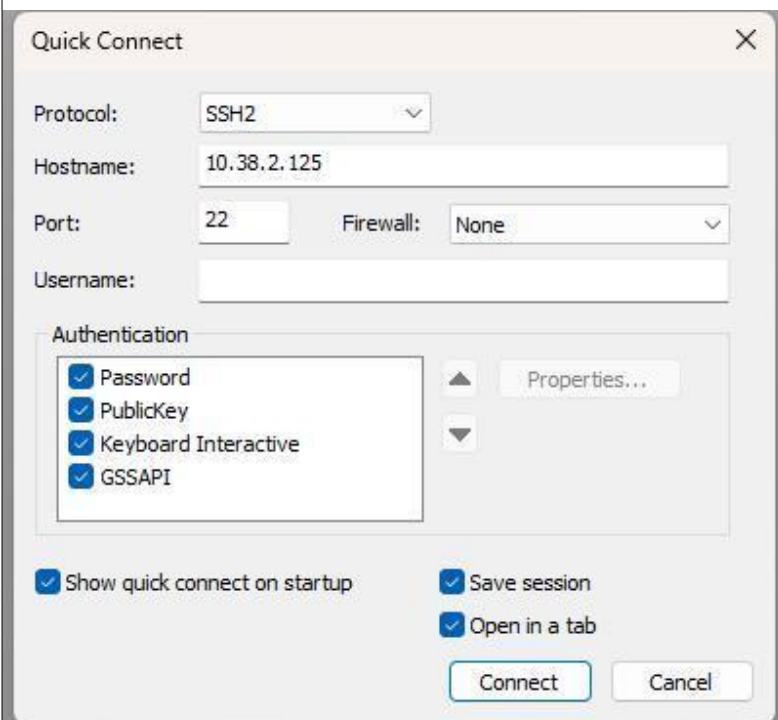

Quick Connect

Protocol: SSH2

Hostname: 10.38.2.125

Port: 22 Firewall: None

Username:

Authentication:

- ☒ Password
- ☒ PublicKey
- ☒ Keyboard Interactive
- ☒ GSSAPI

☒ Show quick connect on startup ☒ Save session ☒ Open in a tab

Connect Cancel



Enter Secure Shell Password

fs1@10.38.2.125 requires a password. Please enter a password now.

OK Cancel

Username: fs1

Password: ••••••••

☒ Save password Skip

Web console: <https://fs2-PowerEdge-R860:9090/> or <https://10.36.15.251:9090/>

Last login: Thu Feb 6 16:51:23 2025 from 10.36.117.156
 root@fs2-PowerEdge-R860:~# mlxlink -d/dev/mst/mt4119_pciconf0 -c

2. Use the NIC model and status read by the server

Read the NIC model

```
Device #1:
-----
Device Type:      ConnectX5
Part Number:      MCX515A-CCA_Ax_Bx
Description:      ConnectX-5 EN network interface card; 100GbE single-port QSFP28; PCIe3.0 x16; tall bracket; ROHS R6
PSID:             MT_0000000011
PCI Device Name:  0000:01:00.0
Base GUID:        b8cef603000c2e44
Base MAC:         b8cef60c2e44
Versions:
  FW              16.35.3502    Available
  PXE             3.6.0902     N/A
  UEFI            14.29.0015    N/A
Status:           No matching image found
```

Read the NIC status

```
[root@RS3110 ~]# mlxlink -d mlx5_0 -c
```

Operational Info

```
-----
State                : Active
Physical state       : LinkUp
Speed               : 100GbE
Width               : 4x
FEC                 : Standard RS-FEC - RS(528,514)
Loopback Mode       : No Loopback
Auto Negotiation     : ON
```

Supported Info

```
-----
Enabled Link Speed   : 0x00f00000 (100G)
Supported Cable Speed : 0x2024a101 (100G,56G,50G,40G,25G,10G,1G)
```

Troubleshooting Info

```
-----
Status Opcode        : 0
Group Opcode         : N/A
Recommendation       : No issue was observed
```

Tool Information

```
-----
Firmware version     : 16.35.3502
MFT Version          : mft 4.30.0-139
```

Physical Counters and BER Info

```
-----
Time Since Last Clear [Min] : 0.6
Effective Physical Errors    : 0
Raw Physical Errors Per Lane : 0,0,0,0
Effective Physical BER       : 15E-255
Raw Physical BER             : 15E-255
Link Down Counter           : 0
Link Error Recovery Counter  : 0
```

3. Read the switch model name and software version, and read the status of all ports on the switch

Test Information

```
RP/0/RP0/CPU0:ios#show version
Mon Mar 10 09:04:40.897 UTC
Cisco IOS XR Software, Version 7.7.21
Copyright (c) 2013-2023 by Cisco Systems, Inc.

Build Information:
  Built By       : deenayak
  Built On       : Thu Jun 29 03:55:49 PDT 2023
  Built Host     : 8ef204814797
  Workspace      : /auto/src/archive16/prod/7.7.21/ncs5500/ws
  Version        : 7.7.21
  Location       : /opt/cisco/xr/packages/
  Label          : 7.7.21

cisco NCS-5500 () processor
System uptime is 3 hours 7 minutes

RP/0/RP0/CPU0:ios#show inventory
Mon Mar 10 09:04:43.826 UTC
NAME: "0/0", DESCR: "NCS55A2 MOD Base Virtual Line Card"
PID: NCS-55A2-MOD-S , VID: V02, SN: FOC251703B3

NAME: "0/0/1", DESCR: "NCS5500 4 QSFP28 with 100G MacSec MPA"
PID: NCS5-MPA-4H-S , VID: V02, SN: FOC252135YG

NAME: "HundredGigE0/0/1/2", DESCR: "Non-Cisco QSFP28 100G SR4 Pluggable Optics Module"
PID: QSFP-SR4-100G , VID: 04 , SN: A2510001132

NAME: "0/0/2", DESCR: "NCS5500 4 QSFP28 with 100G MacSec MPA"
PID: NCS5-MPA-4H-S , VID: V02, SN: FOC252135UB

NAME: "0/RP0", DESCR: "NCS55A2 MOD Base Route Processor Card"
PID: NCS-55A2-MOD-S , VID: V02, SN: FOC251703B3

NAME: "Rack 0", DESCR: "NCS55A2 Fixed Base Chassis"
PID: NCS-55A2-MOD-S , VID: V02, SN: FOC2517R25J

NAME: "0/FT0", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2515R4SS

NAME: "0/FT1", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530RSUJ

NAME: "0/FT2", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530SBSW

NAME: "0/FT3", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530RSXZ

NAME: "0/FT4", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530R5XM

NAME: "0/FT5", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2515R4R5

NAME: "0/FT6", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530SBS7

NAME: "0/FT7", DESCR: "NCS 55A2 FW Fan Tray"
PID: NCS5-A2-FAN-FW , VID: V01, SN: DCH2530SC19

NAME: "0/PM0", DESCR: "NCS 55A2 AC 1200W Power Supply Port-S Intake/Front-to-back"
PID: NCS5-1200W-ACFW , VID: V01, SN: LIT244527NG

NAME: "0/PM1", DESCR: "NCS 55A2 AC 1200W Power Supply Port-S Intake/Front-to-back"
PID: NCS5-1200W-ACFW , VID: V01, SN: LIT244527LL
```

	RP/0/RP0/CPU0:ios# RP/0/RP0/CPU0:ios#show interfaces brief Mon Mar 10 09:04:51.217 UTC						
	Intf Name	Intf State	LineP State	Encap Type	MTU (byte)	Bw (Kbps)	
Test Information	Nu0	up	up	Null	1500	0	
	Te0/0/0/0	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/1	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/2	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/3	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/4	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/5	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/6	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/7	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/8	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/9	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/10	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/11	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/12	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/13	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/14	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/15	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/16	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/17	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/18	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/19	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/20	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/21	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/22	admin-down	admin-down	ARPA	1514	10000000	
	Te0/0/0/23	admin-down	admin-down	ARPA	1514	10000000	
	TF0/0/0/24	down	down	ARPA	1514	25000000	
	TF0/0/0/25	down	down	ARPA	1514	25000000	
	TF0/0/0/26	down	down	ARPA	1514	25000000	
	TF0/0/0/27	down	down	ARPA	1514	25000000	
	TF0/0/0/28	down	down	ARPA	1514	25000000	
	TF0/0/0/29	down	down	ARPA	1514	25000000	
	TF0/0/0/30	down	down	ARPA	1514	25000000	
	TF0/0/0/31	down	down	ARPA	1514	25000000	
	TF0/0/0/32	down	down	ARPA	1514	25000000	
	TF0/0/0/33	down	down	ARPA	1514	25000000	
	TF0/0/0/34	down	down	ARPA	1514	25000000	
	TF0/0/0/35	down	down	ARPA	1514	25000000	
	TF0/0/0/36	down	down	ARPA	1514	25000000	
	TF0/0/0/37	down	down	ARPA	1514	25000000	
	TF0/0/0/38	down	down	ARPA	1514	25000000	
	TF0/0/0/39	down	down	ARPA	1514	25000000	
	Hu0/0/1/2	up	up	ARPA	1514	100000000	
	Hu0/0/1/3	down	down	ARPA	1514	100000000	
	Te0/0/1/1/0	down	down	ARPA	1514	10000000	
	Te0/0/1/1/1	down	down	ARPA	1514	10000000	
	Te0/0/1/1/2	down	down	ARPA	1514	10000000	
	Te0/0/1/1/3	down	down	ARPA	1514	10000000	
	TF0/0/1/0/0	down	down	ARPA	1514	25000000	
	TF0/0/1/0/1	down	down	ARPA	1514	25000000	
	TF0/0/1/0/2	down	down	ARPA	1514	25000000	
TF0/0/1/0/3	down	down	ARPA	1514	25000000		
Hu0/0/2/0	down	down	ARPA	1514	100000000		
Hu0/0/2/1	down	down	ARPA	1514	100000000		
Hu0/0/2/2	down	down	ARPA	1514	100000000		
Hu0/0/2/3	down	down	ARPA	1514	100000000		
Mg0/RP0/CPU0/0	admin-down	admin-down	ARPA	1514	10000000		
4. View post-test results to compare with test metrics							
[root@RS3110 ~]# mlxlink -d mlx5_0 -c							
Operational Info							

State : Active							
Physical state : LinkUp							
Speed : 100GbE							
Width : 4x							
FEC : Standard RS-FEC - RS(528,514)							
Loopback Mode : No Loopback							
Auto Negotiation : ON							
Supported Info							

Enabled Link Speed : 0x00f00000 (100G)							
Supported Cable Speed : 0x2024a101 (100G,56G,50G,40G,25G,10G,1G)							
Troubleshooting Info							

Status Opcode : 0							
Group Opcode : N/A							
Recommendation : No issue was observed							
Tool Information							

Firmware Version : 16.35.3502							
MFT Version : mft 4.30.0-139							
Physical Counters and BER Info							

Time Since Last Clear [Min] : 0.6							
Effective Physical Errors : 0							
Raw Physical Errors Per Lane : 0,0,0,0							
Effective Physical BER : 15E-255							
Raw Physical BER : 15E-255							
Link Down Counter : 0							
Link Error Recovery Counter : 0							
Test Conclusion	After testing, the results of all tested items meet the requirements of the inspection basis.						
Remarks							