

A solid red circle graphic.

FHD-D82128EM3 Data Sheet



Contents

Product Overview	3
Features and Benefits	4
Front Panel and Port Description	4
Application	5
Fiber Loss	5
Technical Specification	6
ITU Channel Guiding	8
High Quality DWDM Transceivers to Build a Passive DWDM System	8
Layout and Dimension	8
Ordering Information	9

Product Overview

The 8CH Mux Demux, based on TFF (Thin Film Filter), is a passive DWDM device featuring high density, low loss, and long-haul transmission suitability. It is integrated with a monitor port and an expansion port. The 1% monitor port allows easy troubleshooting without downtime and the expansion port can be used to add additional channels, providing a cost-effective and easily expandable solution. In addition, this unit can be used as either a multiplexer or de-multiplexer (Mux/Demux). It combines 8-channels of DWDM wavelengths into a composite signal and separates the combined DWDM signal into 8-channels individual wavelengths over a pair of single-mode optical fiber. In accordance with the ITU-T G.694.2, it maximizes the capacity of the C-band range. Designed for maximum configuration flexibility, the DWDM Mux Demux can plug directly into the FHD® chassis, each module occupying one slot.

It supports 1G/10G/25G Ethernet, SDH/SONET, 16/8/4/2/1G Fibre Channel, FTTx and CATV. When deployed with FS DWDM optical transceivers, OEO, EDFA and OADM modules, the Mux Demux seamlessly enables flexible network architectures ranging from simple point-to-point connections to amplified ring configurations.



Features and Benefits

- 8 Channels Compliant to ITU Grid with 100GHz Spacing
- Expansion Port for Adding Additional Channels and Increasing Capacity
- 1% Monitor Port Signal to Monitor the Channel Power Levels
- Enables Space-efficient Integration and Hybrid Deployment of CWDM, DWDM, FAP and MTP Cassettes within the FHD® Chassis
- Passive Transparent Multiplexing at Any Rate, Any Service, Including Ethernet, SDH/SONET, Fibre Channel, FTTx, and CATV
- Suitable for Long-distance Transmission, Including OTN, DCI and WAN Networks
- The Solution can be [Customized](#) per Customer Application Requirements
- Fit into One Slot of the [FHD 4-Slot 1U 19" Rack Chassis](#)


Front Panel and Port Description




LINE	MON	EXP	1310
Line interface for common signal	1% Monitoring for easy troubleshooting	Expansion for add additional channels	Allow for existing 1310nm legacy traffic

Application

The EXP port supports future upgrades by adding more DWDM wavelengths to increase network capacity without disruption. The 1310nm port can accommodate legacy traffic or serves as a dedicated channel for compatibility with existing infrastructure.

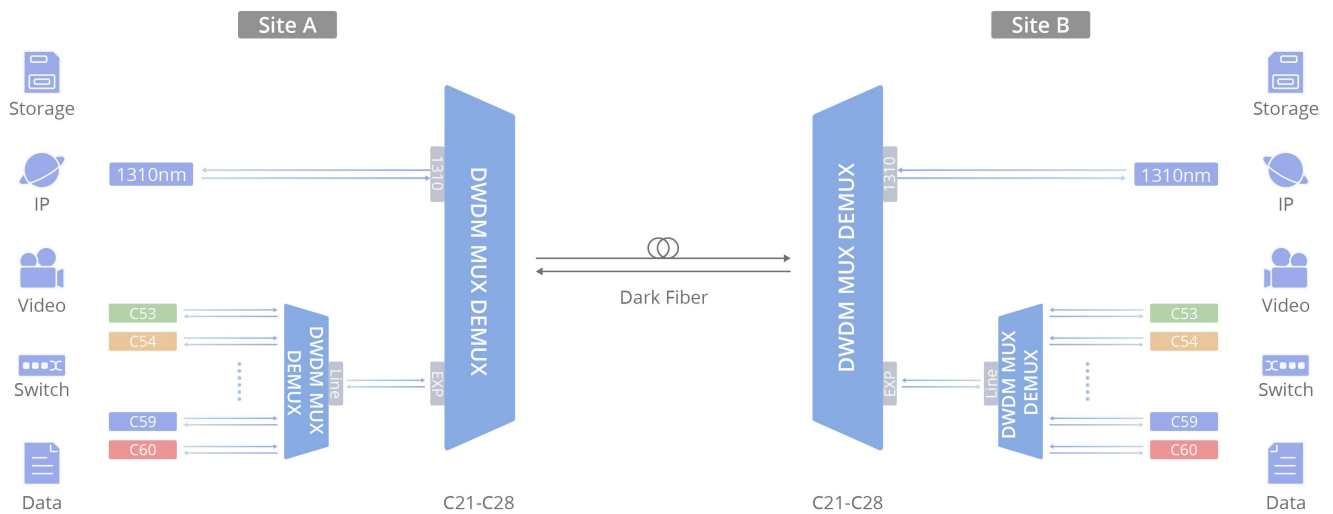

Fiber Loss

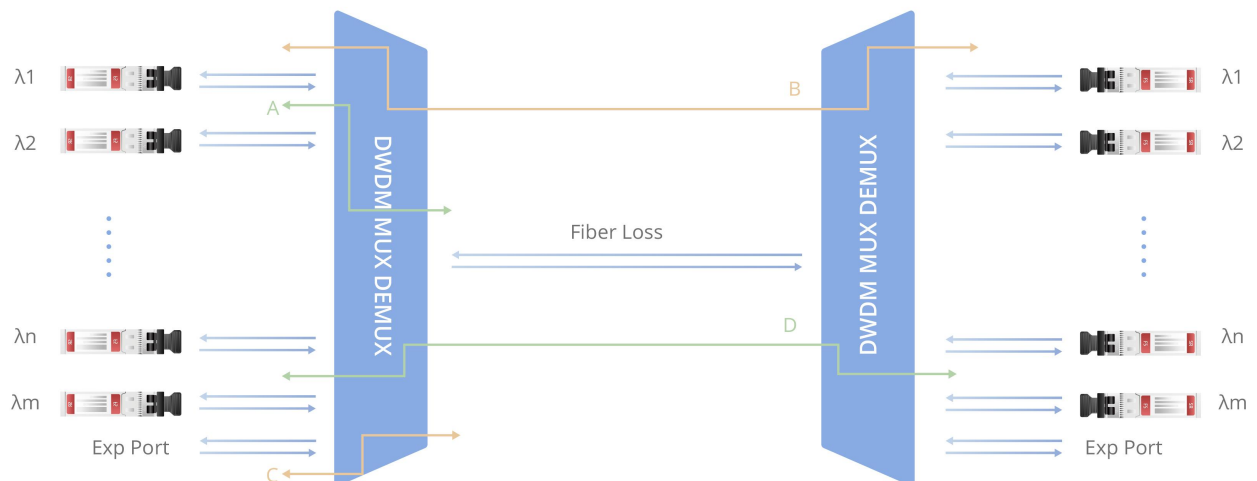

Technical Specification

Parameter	Value
ITU Channel	8 Channels C21-C28
Operating Wavelength	1520-1570nm
Channel Passband	±0.11nm
1310nm Port Passband	1260-1360nm
Channel Passband (EXP Port)	1500-1554.34nm, 1561.21-1620nm
Insertion Loss	≤ 3.1dB, 2.4dB Typical
Insertion Loss, Per Channel (A)	≤ 3.1dB
Link Loss, Per Channel (B)	≤ 4.7dB
Insertion Loss, Expansion Port (C)	≤ 1.3dB
Link Loss, Expansion Ports (D)	≤2.6dB
Channel Spacing	100GHz (0.8nm)
Insertion Loss @ 1310 port	≤1.3dB
Insertion Loss @ 1% MON	≤24dB
EXP Isolation	≥30dB

Parameter	Value
Adjacent Channel Isolation	≥30dB
Non-adjacent Channel Isolation	≥40dB
Technology	TFF (The Film Filter)
Passband Ripple	≤0.5dB
Directivity	≥45dB
Return Loss	≥45dB
Polarization Dependent Loss	≤0.3dB
Polarization Mode Dispersion	≤0.1ps
Max Optical Power	≤500mW (27dBm)
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Fiber Type	G657 A1
Rack Space	1U ¼-width Plug-in Module
Housing	Pluggable Module (Occupies 1 Slot in FHD Chassis)
Dimensions	1.38"x4.29"x4.64" (35x109x118mm)

Notes: 1.Specified with connectors andadapters.

ITU Channel Guiding

ITU Channel (xx or yy)	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Wavelength (nm)	1560.61	1559.79	1558.98	1558.17	1557.36	1556.55	1555.75	1554.94	1554.13	1553.33	1552.52	1551.72	1550.92	1550.12	1549.32	1548.51	1547.72	1546.92	1546.12	1545.32

ITU Channel (xx or yy)	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Wavelength (nm)	1544.53	1543.73	1542.94	1542.14	1541.35	1540.56	1539.77	1538.98	1538.19	1537.40	1536.61	1535.82	1535.04	1534.25	1533.47	1532.68	1531.90	1531.12	1530.33	1529.55

High Quality DWDM Transceivers to Build a Passive DWDM System


FS.COM offers DWDM transceiver modules in SFP, SFP+ and XFP formats. Every optics is tested in real switches and full compatible with Cisco, Juniper, Arista, Brocade, Dell, Extreme, etc.

Transmission distances range from 20-120km for Gigabit speeds, and 40-120km for 10 Gigabit speeds, without the use of optical amplifiers.




DWDM-SFP10G-80 DWDM-XFP10G-80 DWDM-Tunable-XFP DWDM-Tunable-SFP+ DWDM-SFP1G-ZX

Layout and Dimension

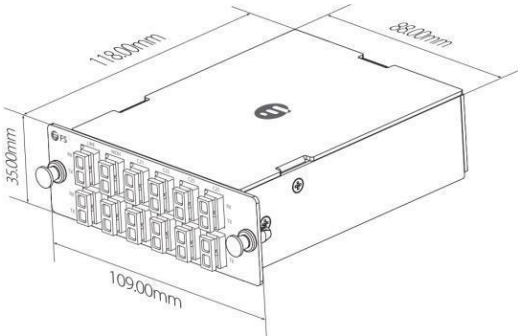

Height: 1.38" (35mm)
Width: 4.29"(109mm)
Depth: 4.64"(118mm)

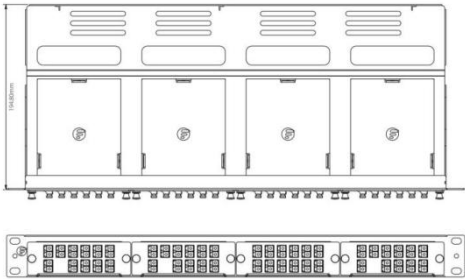

4-slot FHD managed chassis, supports up to 4 DWDM Mux Demux or CWDM Mux Demux modules with different channels in FHD packages.
Height: 1.73" (44mm)
Width: 19.00" (482.6mm)
Depth: 7.67" (194.8mm)
Mux Demux plug-in module occupies one slot.

Ordering Information

Mux Demux & OADM		
FHD Series Mux Demux	FHD-D82128EM3	8 Channels DWDM Mux Demux, 100GHz C21-C28, with EXP & Mon and 1310nm Port, 2.4dB Typical IL, LC/UPC, Dual Fiber, High Density, FHD® Plug-in Module#126899
	FHD-D82936EM	8 Channels DWDM Mux Demux, 100GHz C29-C36, with Monitor and Expansion Port, 2.4dB Typical IL, LC/UPC, Dual Fiber, High Density, FHD Plug-in Module#126900
	FHD-D85360EM	8 Channels DWDM Mux Demux, 100GHz C53-C60, with Monitor and Expansion Port, 2.4dB Typical IL, LC/UPC, Dual Fiber, High Density, FHD Plug-in Module, CWDM/DWDM Hybrid Solution#126901
	FHD-C84761EM	8 Channels CWDM Mux Demux, 1470-1610nm, with Monitor and Expansion Port, 2.0dB Typical IL, LC/UPC, Dual Fiber, High Density, FHD Plug-in Module#126902
	FHD-C82745EM	8 Channels CWDM Mux Demux, 1270-1450nm (Skip 1390, 1410nm), with Monitor and Expansion Port, 2.0dB Typical IL, LC/UPC, Dual Fiber, High Density, FHD Plug-in Module#126903
Custom Mux Demux	MUX-DWDM	Customized Dual and Single Fiber DWDM Mux Demux#322911
	MUX-CWDM	Customized Dual and Single Fiber CWDM Mux Demux#70410
	MUX-CCWDM	Customized Dual and Single Fiber Compact CWDM Mux Demux#73961
OADM	DOADM-EAW	Customized Dual and Single Fiber DWDM OADM, East and West#70427
	DOADM-EOW	Customized Dual and Single Fiber DWDM OADM, East or West#73795
	COADM-EAW	Customized Dual and Single Fiber CWDM OADM, East and West#70425
	COADM-EOW	Customized Dual and Single Fiber CWDM OADM, East or West#73794
Chassis	FHD-1U-CMP400	FHD® High Density 1U Rack Mount Modular Enclosure Unloaded, Rear Cable Managers, Holds up to 4 x FHD® Cassettes or Panels, 144 Fibers (LC)#70419
Optical Line System		
Amplifiers	FMT20PA-EDFA	FMT20PA-EDFA, 20dB Gain C-band DWDM EDFA Pre-amplifier for FMT Managed Chassis, 13dBm Output#72284
	FMT26PA-EDFA	FMT26PA-EDFA, 26dB Gain C-band DWDM EDFA Pre-amplifier for FMT Managed Chassis, 16dBm Output#36524
	FMT17BA-EDFA	FMT17BA-EDFA, 17dB Gain C-band DWDM EDFA Booster Amplifier for FMT Managed Chassis, 17dBm Output#72283
	FMT26PA-51EDFA	FMT26PA-51EDFA, 26dB Gain Extended C-Band DWDM EDFA Pre-amplifier for FMT Managed Chassis, 20dBm Output#248135
	FMT17BA-51EDFA	FMT17BA-51EDFA, 17dB Gain Extended C-Band DWDM EDFA Booster Amplifier for FMT Managed Chassis, 20dBm Output#248133
	FMT-EDFA	Customized C-band DWDM EDFA Amplifier for DWDM Solution#322907
	FMT-ARRAY-OA	Customized Multiports DWDM Array EDFA Amplifier#322909
Dispersion Compensation	FMT40-DCM	FMT40-DCM, C-Band 40km DCF-based Passive Dispersion Compensation Module for FMT Managed Chassis#65781
	FMT80-DCM	FMT80-DCM, C-Band 80km DCF-based Passive Dispersion Compensation Module for FMT Managed Chassis#65779
	FS-DCM	Customized C-Band DCF-based Dispersion Compensation Module for FMT Managed Chassis#65783
Line Protection	FMT-OLP2	FMT-OLP2, 1+1 Optical Line Protection Switch for FMT Managed Chassis#66010
	FMT-OLP	FMT-OLP, 1:1 Optical Line Protection Switch for FMT Managed Chassis#192620

TRANSPONDERS & MUXPONDERS

	FMT4DL-OEO25GSFP28	FMT4DL-OEO25GSFP28, 4 Channels 25G WDM Transponder (Converter) for FMT Managed Chassis, 8 SFP28/SFP+ Slots#92056
10G	FMT4DL-OEO10GSFP	FMT4DL-OEO10GSFP, 4 Channels WDM Transponder (Converter) for FMT Managed Chassis, 8 SFP/SFP+ Slots#30515
	FMT04-CH1U	FMT04-CH1U, 4 Slots 1U Managed Chassis Unloaded Platform, Redundant AC PSUs, Support SNMP V1 Network Management#39214
Chassis	FMTCH	FMT-CH, Customized 4/8/16 Slots 1U/2U/4U Managed Chassis Unloaded Platform, Redundant AC/DC PSUs, Support SNMP Network Management#70413

WDMTRANSCEIVERS

100G/200G CFP2	CFP2-DCO-200G-M	C14 1566.31nm CFP2-DCO 100G/200G DWDM C-band Tunable 96Chs ITU CH13-CH60 50GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#120128
25G SFP28	DW-SFP25G10-17	Cisco C17 DWDM-SFP25G-63.86 Compatible SFP28 25G DWDM 1563.86nm 100GHz 10km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#87000
	CW-SFP25G30-27	Cisco CWDM-SFP25G-1270-30 Compatible SFP28 25G CWDM 1270nm 30km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#100112
	CW-SFP25G10-27	Cisco CWDM-SFP25G-1270-10 Compatible SFP28 25G CWDM 1270nm 10km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#76003
10G SFP+	LW-SFP25G40-86	Cisco LWDM-SFP25G-86.66 Compatible SFP28 25G LWDM 1286.66nm 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#93786
	DW-SFP10G80-21-I	Cisco C21 DWDM-SFP10G-60.61-I Compatible SFP+ 10G DWDM 1560.61nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#113562
	DW-SFP10G40-21-I	Cisco C21 DWDM-SFP10G-60.61-I Compatible SFP+ 10G DWDM 1560.61nm 100GHz 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#113511
1GSFP	CW-SFP10G80-47	Cisco CWDM-SFP10G-1470 Compatible SFP+ 10G CWDM 1470nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#19367
	CW-SFP10G40-27-I	Cisco CWDM-SFP10G-1270-I Compatible SFP+ 10G CWDM 1270nm 40km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission (Industrial)#112392
	DWDM-SFP1G-EZX	Cisco C17 DWDM-SFP-6386 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 100km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#54150
	DWDM-SFP1G-ZX	Cisco C17 DWDM-SFP-6386-80 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#47697
	CWDM-SFP1G-ZX	Cisco CWDM-SFP-1270 Compatible SFP 1000BASE-CWDM 1270nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#33234
	DWDM-SFP1G-ZX	Cisco C17 DWDM-SFP-6386-80 Compatible SFP 1000BASE-DWDM 1563.86nm 100GHz 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#47697
	CWDM-SFP1G-ZX	Cisco CWDM-SFP-1270 Compatible SFP 1000BASE-CWDM 1270nm 80km DOM Duplex LC/UPC SMF Optical Transceiver Module for Transmission#33234

*Standard products are listed above. Customized specifications are available upon request.



Delaware, United States

Address: Delaware: 380 Centerpoint Blvd, New Castle, DE 19720, United States
Email: US@fs.com
Tel: +1 (888) 468-9910

Germany

Address: Röntgenstraße 18, 85757 Karlsfeld, Germany
Email: DE@fs.com
Tel: +49 (0) 8131 377 3008

Australia

Address: 57-59 Edison Rd, Dandenong South, VIC 3175, Australia
Email: AU@fs.com
Tel: +61 3 5909 9990

Japan

Address: JS Progress Building 5F, 4-1-23, Heiwajima, Ota Ku, Tokyo, 143-0006, Japan
Email: JP@fs.com
Tel: +81-3-6897-9438

California, United States

Address: California: 15241 Don Julian Rd, City of Industry, CA 91745, United States
Email: US@fs.com
Tel: +1 (888) 468-9910

United Kingdom

Address: Unit 8, Urban Express Park, Union Way, Aston, Birmingham B6 7FH, United Kingdom
Email: UK@fs.com
Tel: +44 (0) 121 726 4775

Singapore

Address: 7002 ANG MO KIO AVENUE 5 #05-02 Singapore 569914
Email: SG@fs.com
Tel: +65 31381992



FS has several offices around the world. Addresses, phone numbers are listed on the FS Website at https://www.fs.com/contact_us.html. FS and FS logo are trademarks or registered trademarks of FS in the U.S. and other countries.